

One-Light Flush Mount

 Ceiling flush mounted • Damp location listed **PROGRESS LED**


P3658-2030K9

Description:

One light 11 inch LED flush mount adorned with industrial-inspired accents and etched glass. Antique Bronze finish.

Specifications:

- Antique Bronze (-20) (painted)
- Steel Construction
- Etched glass bowl
- LED Module is replaceable (part # 93053641)
- Industrial style inspired.
- 1,211 lumens 71.2 lumens/watt per module (source)
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Ceiling pan covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	861/51.9 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified

Images:



Dimensions:

Diameter: 11"
Height: 4-1/8"

Photometrics:

P3658-2030K9

ELECTRICAL DATA	P3658-2030K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

*See Dimming Notes for more information

P3658-2030K9


LED Light Engine: 3000 K 90 CRI
 System Wattage: 17
 Fixture delivered lumens: 861
 Fixture Efficacy: 51.9
 Spacing Criteria: 1.3

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	263	
5	263	25
15	253	71
25	234	108
35	209	131
45	175	135
55	138	124
65	102	101
75	69	73
85	43	48
90	34	
95	26	29
105	13	14
115	3	3
125	0	0
135	0	0
145	0	0
155	0	0
165	0	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	205	23.8
0-40	335	38.9
0-60	594	69.0
0-90	815	94.7
90-120	46	5.3
90-130	46	5.3
90-150	46	5.3
90-180	46	5.3
0-180	861	100.0

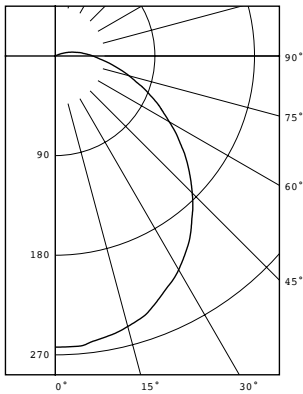

Test 15.00739 Test Date 05/07/15

P3658-2030K9

Dimming Notes:

P3658 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron	Nova T	NTELV-300
Lutron	Vierti	VTELV-600
Lutron	Maestro	MAELV-600
Lutron	spacer/system	SPSELV-600
Leviton	Renoir II	AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.