


**STARBOARD™ L**

**FP6752\*\*M  
52" Ceiling Fan**

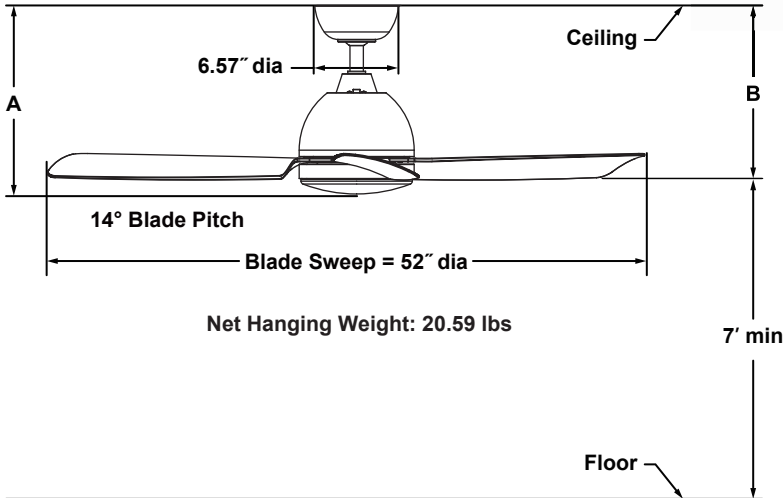

	A	B
Fan w/4.5" downrod	14.99"	13.67"
Fan w/12" downrod	22.49"	21.17"
Fan w/18" downrod	28.49"	27.17"
Fan w/24" downrod	34.49"	33.17"
Fan w/36" downrod	46.49"	45.17"
Fan w/48" downrod	58.49"	57.17"
Fan w/60" downrod	70.49"	69.17"
Fan w/72" downrod	82.49"	81.17"

**INSTALLATION REQUIREMENTS:**

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

**ELECTRICAL REQUIREMENTS:**

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

**MOTOR SPECS:**

188 x 25 AC motor is designed for optimal performance with this fan.

**BLADES:**

A set of three 24" composite blades is included.

**LIGHTING OPTIONS:**

One 24-watt LED included.

**CONTROL OPTIONS:**

CW2WH-6752 3-speed wall control is included. Slide button wall control has 3 fan speeds, infinite light levels and off button. The reverse switch is located on the motor assembly. Optional WC2WH, WR501WH, CWRL4 and WR506WH wall controls — sold separately. Optional CR500 and CR530 hand-held remote controls and WFR50 WiFi receiver unit are available — sold separately. Instructions are provided with each control.

**DOWNROD OPTIONS:**

Fan comes with a 1" dia. x 4.5" long downrod (DR1SS-45). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 18" downrod or longer downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

**LOCATION USE:**

Fan is rated for dry, damp and wet locations. This fan is for room up to 400 sq ft.

Available Finish	
BLM	Black with Black Blade
BNM	Brushed Nickel with Brushed Nickel Blade
DZM	Dark Bronze with Dark Bronze Blade
MWM	Matte White with Matte White Blade

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	179	6718	77	0.74	88
Med	105	3988	113	0.47	35
Low	59	1926	165	0.27	12

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
52	4473	15	86

Lighting Information (120V)					
Light Bulb	Lumens Amount	Delivered Lumens	Color Temp	CRI	Shade/Glass type
24W LED	2000	1103	3000	90%	Opal Frosted

Fan Velocity (FPM)	
High Speed Velocity	Average Velocity
611	393