
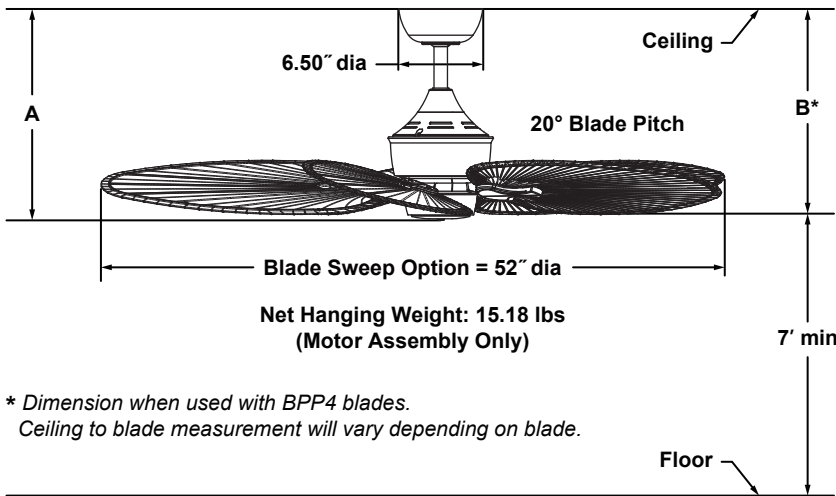


ISLANDER® DC

MAD3250
Ceiling Fan**

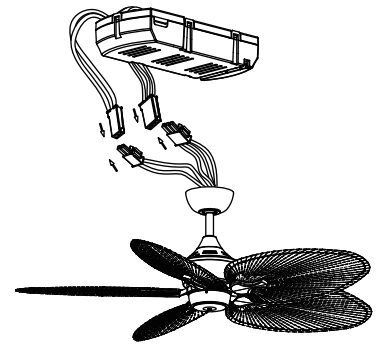

* Dimension when used with BPP4 blades.
Ceiling to blade measurement will vary depending on blade.

featuring KwikWire easy connection

	A	B*
Fan w/6" downrod	16.26"	15.84"
Fan w/12" downrod	22.26"	21.84"
Fan w/18" downrod	28.26"	27.84"
Fan w/24" downrod	34.26"	33.84"
Fan w/36" downrod	46.26"	45.84"
Fan w/48" downrod	58.26"	57.84"
Fan w/60" downrod	70.26"	69.84"
Fan w/72" downrod	82.26"	81.84"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

DC125NS motor is designed for optimal performance with this fan.

BLADES:

5 bladed blade sets are available in composite materials — all sold separately. See our catalog or visit www.fanimation.com for blade options.

NOTE: Fan speeds will vary according to blade set — material, shape and size of blade. In general, smaller blades will turn faster than bigger ones and narrower blades will turn faster than wider ones.

CONTROL OPTIONS:

A WiFi receiver and TR360 hand-held remote control are included. Push button remote control with 6 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Visit the Apple APP Store or Google Play Store to download the free fanSync WiFi APP and create your Fanimation fanSync account. Optional TW406 wall control is available — sold separately. Instructions are provided with each control.

NOTE: This MAD3250 model currently has no optional light fixtures and no light functions.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a standard 12" downrod or longer downrod (Measured with BPP4 Blade). Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Optional close-to-ceiling kit is available as well — sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations. This fan is for room up to 400 sq ft.

Available Finishes	
BL	Black
BN	Brushed Nickel
BS	Brushed Satin Brass
DZ	Dark Bronze
MW	Matte White

Airflow / Energy Efficiency Info (120V) test with BPP4 Blades in 52" sweep					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (6 th)	119	5141	154	0.49	33
Med (4 th)	93	3952	240	0.23	16
Low (1 th)	50	2205	635	0.06	3

Energy Guide FTC Measured with BPP4 Blades in 52" sweep			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
22	3764	6	173

Fan Velocity (FPM) Measured with BPP4 Blades in 52" sweep	
High Speed Velocity	Average Velocity
361	253